





ELECTRO-LUBER™ KNOWLEDGE BASE

DIMENSIONS

MINI-LUBER
125cc

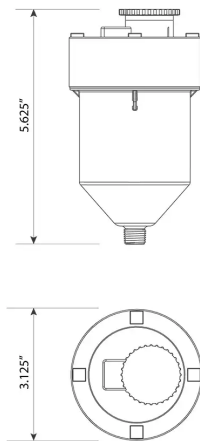

JUMBO-LUBER
475cc

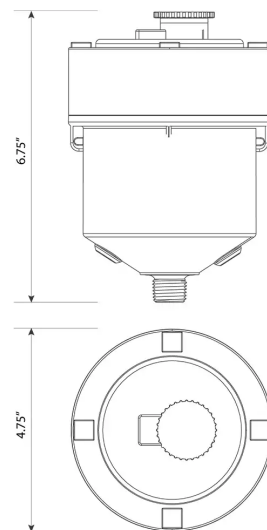

SETTINGS

MINI-LUBER

125CC		
Switch Setting	Daily Output (68°F)	Discharge Period
All	8.5cc	14.2 Days
1	4cc	30 Days
2	2cc	60 Days
3	1.33cc	90 Days
6 + 12	1.0cc	120 Days
6 + B	0.9cc	133 Days
6	0.67cc	180 Days
12 + B	0.5cc	240 Days
12	0.33cc	360 Days

JUMBO-LUBER

475CC		
Switch Setting	Daily Output (68°F)	Discharge Period
All	31.8cc	14.2 Days
1	15cc	30 Days
2	7.5cc	60 Days
3	5.0cc	90 Days
6 + 12	3.7cc	120 Days
6 + B	3.4cc	133 Days
6	2.5cc	180 Days
12 + B	1.9cc	240 Days
12	1.25cc	360 Days

Installation - ELECTRO-LUBERT™



ELECTRO-LUBER INSTALLATION INSTRUCTIONS

(.pdf)

[DOWNLOAD](#)



ELECTRO-LUBER UL CERTIFICATION

(.pdf)

[DOWNLOAD](#)



MINI-LUBER 2D DRAWING

(.pdf)

DOWNLOAD



JUMBO-LUBER 2D DRAWING

(.pdf)

DOWNLOAD



HOW TO ORDER AN ELECTRO-LUBER™

(.pdf)

DOWNLOAD